

AN-XA7XXXX-X Series HF SMD TCXO/VCTCXO Ultra Low Phase Noise

Rev W

Description: The AN-XA7XXXX Series of SMD temperature compensated crystal oscillators (TCXO), provides High Frequency with excellent temperature stability, ultra low phase noise and jitter with Sine-wave output in a small surface mount FR4 based package.

Features

- Small, Low Profile SMD Package
- Very Low Phase Jitter and Phase Noise
- Excellent Frequency Stability
- Frequency – up to 250 MHz
- No Multiplication – no sub-harmonics
- Stratum3 available
- COTS/Dual use

Creating a Part Number

AN - X A7 X X X X - X - FREQ

Package Code
AN 8 Pad 17x14x6mm SMD

Environmental

| Code | Specification |
|------|---|
| L | Contains a level of lead that is in excess of RoHS directive. |
| R | RoHS compliant |

Supply Voltage

| Code | Specification |
|------|---------------|
| 0 | 5V ±5% |
| A | 3.3V ±5% |

Voltage Control

| Code | Specification |
|------|--------------------|
| V | Voltage Control |
| N | No Voltage Control |

Phase Noise Grade

| Code | Specification |
|------|--------------------|
| L | Standard per table |
| P | Premium per table |
| U | Ultimate per table |

Temp. Frequency Stability

| Code | Specification |
|------|-------------------|
| 1 | ±1.0 ppm |
| 2 | ±2.5 ppm |
| 3 | ±0.28 ppm |
| 9 | Customer Specific |

Temperature Range

| Code | Specification |
|------|---------------|
| E | -10°C to 60°C |
| B | 0°C to 70°C |
| C | -20°C to 70°C |
| D | -40°C to 85°C |

Not all combinations available – consult factory

AN-XA7XXXX-X Series

Rev W

| (1) | | | | | | | |
|-----------------------|--------------|---|------------------------------|---|-------------------------------------|--|--|
| <i>Specifications</i> | | | | | | | |
| Parameter | Symb | Condition | Min | Typ | Max | Unit | Note |
| Electrical | | | | | | | |
| Frequency Range | F | Sine-wave | 10 | | 250 | MHz | |
| Input Voltage | Vcc | | 3.135 4.75 | 3.30 5.0 | 3.465 5.25 | V | A 0 |
| Input Current | Icc | Sine | | | 40 | mA | @100MHz, 3.3V |
| Frequency Stab. | $\Delta F/F$ | Overall, available | | | ± 4.6 | | 20 years |
| Frequency Stability | $\Delta F/F$ | vs. Temperature vs. Vcc aging | | ± 0.5 ± 0.1 ± 1 ± 2.5 ± 3.5 | ± 1 | ppm ppm/V ppm/year ppm ppm | See chart First Year 7 years 10 years |
| Calibration | $\Delta F/F$ | As shipped, 25°C | | ± 0.5 | ± 1 | ppm | |
| Load | | Sine | Internally AC-coupled 50 Ohm | | | | |
| Output power (2) | P | Sine-wave Into 50 Ohms | 0 4 | 3 7 | | dBm | 3.3V 5.0V |
| Start up time | Ts | | | 2 | 100 | ms | |
| Phase Jitter | | 1 σ | | 0.4 0.2 | 1 0.4 | ps | 100Hz to 20MHz 12KHz to 20MHz |
| Subharmonics | | | none | | | | |
| Spurious | | | | | -80 | dBc | @ 100 MHz |
| Harmonics | | Sine-wave | | -30 | -25 | dBc | |
| SSB Phase Noise | | @10Hz @100 Hz @1 KHz @10 KHz @100 KHz | | -80 -110 -140 -155 -160 | | dBc/Hz | @100MHz, Grade L |
| SSB Phase Noise | | @10Hz @100 Hz @1 KHz @10 KHz @100 KHz | | -90 -120 -146 -160 -165 | | | @100MHz, Grade P |
| SSB Phase Noise | | @10Hz @100 Hz @1 KHz @10 KHz @100 KHz | | -95 -128 -152 -170 -172 | -93 -125 -150 -168 -170 | | @100MHz, Grade U (3) |
| SSB Phase Noise | | @10Hz @100 Hz @1 KHz @10 KHz @100 KHz | | -105 -135 -150 -160 -165 | | dBc/Hz | @20 MHz |
| Input Impedance | | | >10K Ohm | | | | |
| Control voltage | Vc | | 0 | | 3.0 | V | |
| Modulation bandwidth | MB | | | | 1.5 | Hz | |
| Deviation | $\Delta F/F$ | Vc=0V to 3.3V,25°C | ± 5 | ± 7 | | ppm | |

Note: 1) All parameters, unless otherwise specified, are at nominal conditions, ie: T=25°C, Nominal Vcc & Nominal Load

2) Higher output power available – consult factory (current consumption may increase)


3) -40 to 85°C range for “U” grade is available with 5 V Vcc option only.

Absolute Maximum Ratings

| Parameter | Symb | Condition | Min | Typ | Max | Unit | Note |
|--------------------------|------|-----------|------|-----|-----|------|------|
| Input Break Down Voltage | Vcc | | -0.5 | | 5.5 | V | |
| Storage temp. | Ts | | -40 | | 105 | °C | |
| Contr. Voltage | Vc | | -1 | | 9 | V | |

Environmental and Mechanical


| | |
|-----------------------|--|
| Operating temp. range | 0°C to 70°C , -40°C to 85°C, see chart, page 1 |
| Mechanical Shock | Per MIL-STD-202, Method 213, Cond. E |
| Thermal Shock | Per MIL-STD-883, Method 1011, Cond. A |
| Vibration | Per MIL-STD-883, Method 2007, Cond. A |
| Soldering Conditions | See MAX reflow profile; The device may be reflowed once. Reflowing upside down is not allowed. NO CLEAN assembly is recommended. |
| Hermetic Seal | Leak rate less than 1×10^{-8} atm.cc/s of helium (crystal only) |

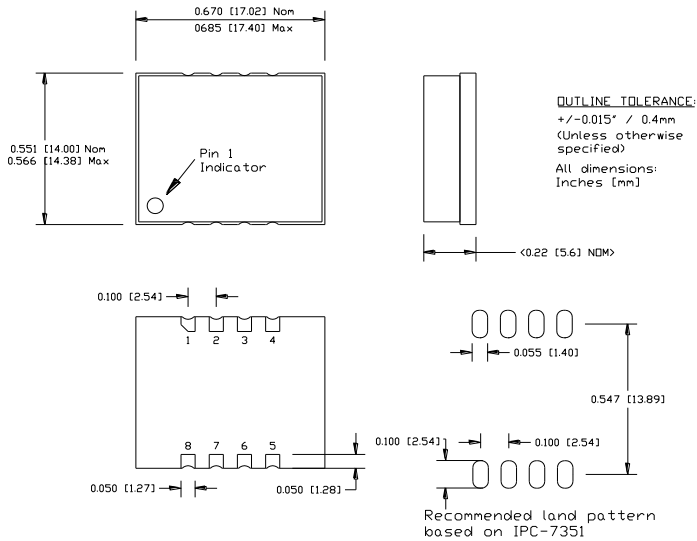

Electrical Connections

| | |
|---------|---|
| Pin out | Pin 1=Vcc; Pin 2=Do Not Connect; Pin 3=GND; Pin 4=GND; Pin 5=Output; Pin 6= Optional Voltage Control; Pin 7 & 8= Do Not Connect |
|---------|---|

Maximum solder reflow profile

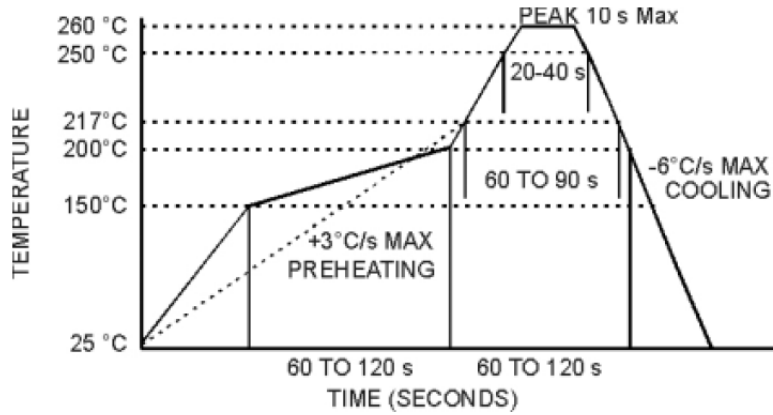

The device may be reflowed once. Reflowing upside down is not allowed. NO CLEAN assembly is recommended.