

## O-CMR-0YZXX-XX-X-Freq Precision Ultra Low Phase Noise Multi Frequency OCXO Reference Module (MFRM)


The MFRM consists of two Ultra Low Phase Noise (ULPN) OCXO at 10 MHz and 100 MHz. Both are packaged in hermetically sealed metal cans. The unit at 100 MHz is phase/frequency locked to the 10 MHz one. The output of 100 MHz unit is then multiplied integer number of times, up to 10 to achieve a ULPN output signal at from 200 MHz to up to 1,000 MHz (1 GHz). Lower frequency OCXO provides for excellent frequency stability over temperature, including optional double oven (DOCXO), time (aging), supply and load variations, as well as exceptionally low phase noise close to the carrier, and short-term stability (Allan Deviation). 100 MHz OCXO provides for ultra low phase noise on the noise floor, including multiplied outputs.

### Features:

- Three frequency outputs 10 MHz, 100 MHz, and 100xN MHz
- Ultra Low Phase Noise
  - -115 dBc/Hz at 1 Hz offset, -145 dBc/Hz at 10 Hz offset for 10 MHz
  - -123 dBc/Hz at 10 Hz offset, -180 dBc/Hz on the floor for 100 MHz
  - -105 dBc/Hz at 10 Hz offset, -160 dBc/Hz at 100 KHz for 1 GHz
- Excellent temperature stability from 2 ppb peak to peak (single oven option), and from +/-0.1 ppb for DOCXO
- Low aging from 0.20 ppb/day
- Excellent short-term stability ADEV < 1E-12 at 1 s
- Optional External Reference
- Optional SMB connector for highest frequency output


### Applications:

- Instrumentation
- High Performance Synthesizers
- Radar
- Telecommunication Equipment

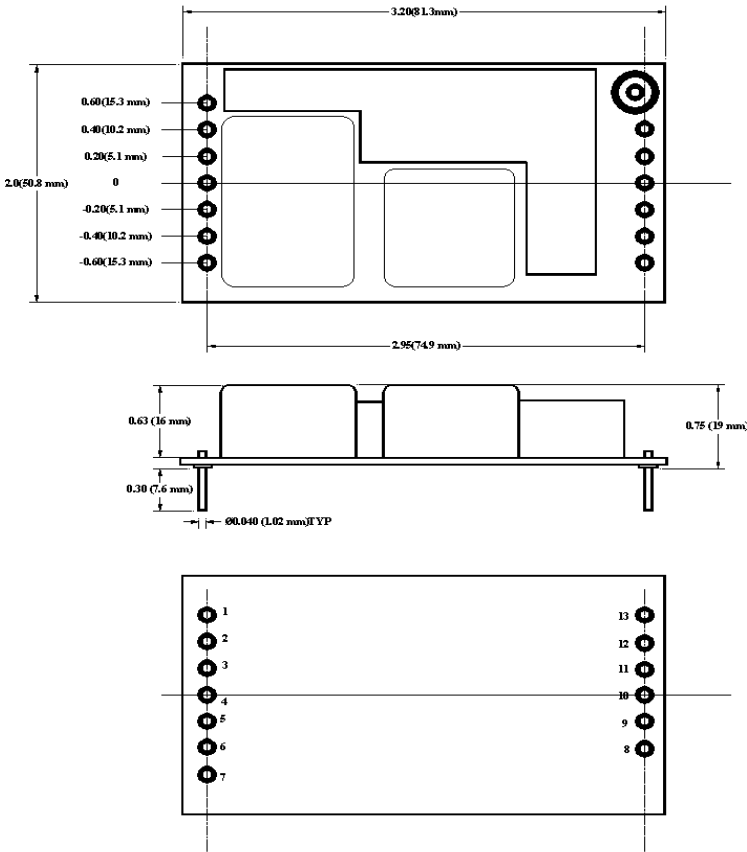

**Pin-out:**

Pin #1 = Vcc 10; Pin #2 = Vc; Pin#3 = Vref; Pin#4 = RF OUT 10 MHz  
 Pin #5 = GND; Pin#6 = EXT REF IN (optional);  
 Pin #7 = REF Select (optional); Pin #8 = RF OUT High Freq.; Pin #9 = GND;  
 Pin #10 = GND; Pin #11 = GND; Pin #12 = RF OUT 100 MHz; Pin #13 = Vcc 100

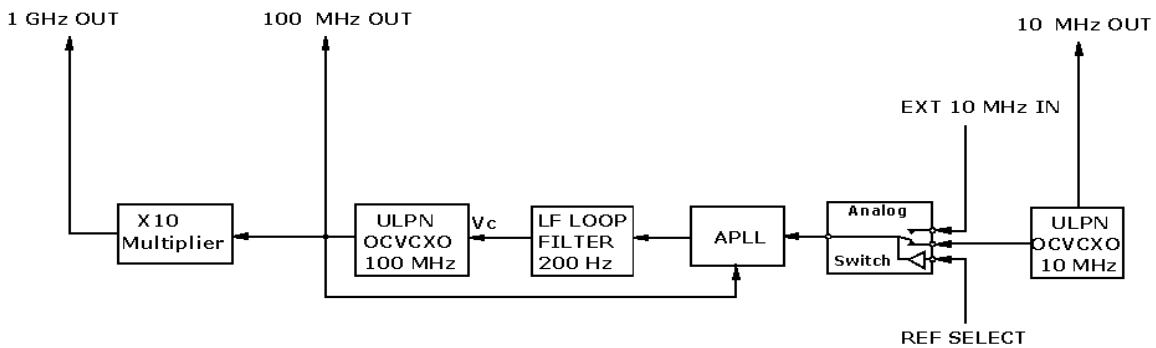

## Specifications:

Parameter	Symb	Condition	Min	Typ	Max	Unit	Note
<i>Absolute Maximum Ratings</i>							
<b>Input Break Down Voltage</b>	V <sub>cc</sub>	5 V supply	-0.5		5.5	V	
<b>Storage temper.</b>	T <sub>s</sub>		-50		90	°C	
<b>Control Voltage</b>	V <sub>c</sub>		-1 -5 -1		5.5 5 11	V	Slope option "P" Slope option "N" Slope option "L"

### Electrical (6)

<b>Frequency</b>	F10			10.000		MHz	Pin4
	F100			100.000			Pin12
	FXN			100xN			Pin8
<b>Frequency stability 7*</b>	ΔF/F	vs. Temp. 4*		±10		ppb	See chart below
		vs. Supply		0.2	0.3	ppb/10% V <sub>cc</sub>	
<b>Aging 7*</b>		per day per year, first year second year		5E-10 1E-7 3E-8			after 30 days 0.2 ppb/day available
<b>Allan Deviation 7*</b>		0.1s		5E-13			
		1s		2E-12			
		10s		5E-12			
<b>SSB Phase Noise (achieved after 10 minutes warm-up) 7*, 8*</b>	£(Δf)	1Hz		-115		dBc/Hz	10 MHz output
		10 Hz		-145			
		100 Hz		-157			
		1 KHz		-162			
		10 KHz		-170			
		100 KHz		-172	-170		
		10 Hz		-125	-123	dBc/Hz	100 MHz output
		100 Hz		-135	-132		
		1 KHz		-163	-162		
		10 KHz		-175	-173		
		100 KHz		-180	-179		
		10 Hz		-105		dBc/Hz	1,000 MHz output
		100 Hz		-112			
		1 KHz		-142			
		10 KHz		-158			
		100 KHz		-160	-158		
10 Hz		-122	-120		160 MHz output		
100 Hz		-130	-128				
1 KHz		-160	-158				
10 KHz		-170	-168				
100 KHz		-175	-174				
10 Hz		-120	-119	dBc/Hz	200 MHz output		
100 Hz		-130	-126				
1 KHz		-160	-156				
10 KHz		-173	-170				
100 KHz		-175	-173				
<b>Retrace 7*</b>		After 30 minutes			±10	ppb	24 Hours off 3*
<b>G-sensitivity 7*</b>		worst direction			±1.0	ppb/G	
<b>Input Voltage</b>	V <sub>cc</sub>		4.75	5.0	5.25	V	
<b>Power consumption, Still air</b>	P	steady state, 25°C		3.2	3.5	W	Standard Operating Temperature*.
		steady state, -30°C		5.5			
		start-up @ -30°C		6.0	7.0		
<b>Spectral Purity</b>		Subharmonics		-50	-40	dBc	At 1,000 MHz output Either output
		Spurious			-80		
		Harmonics		-35	-30		

Load	Internally AC-coupled 50 Ohm					All Outputs
<b>Warm-up time</b>	$\tau$	to 0.1ppm accuracy		3	5	minutes
<b>Output Waveform</b>	Sinewave					
<b>Output Power</b>			+13 +15 +10	+14 +18 +14	+16	dBm  10 MHz 100 MHz 100xN MHz
<b>External Reference</b>		Sine Wave	+7			dBm
<b>Reference Select function</b>		Floating Logic "0" (GND)	Internal Reference External reference			Pin6 9*, Option E
<b>Control voltage</b>	Vc		0 -4.0 0		Vref 4.0 10.0	V  Slope option "P" Slope option "N" Slope option "L"
<b>Input impedance</b>	Zin	At Vc pin	10			KOhm
<b>Modulation bandwidth</b>	Fm				1	Hz
<b>Reference Voltage</b>	Vref			4.5		V  Pin#2 is not connected with slope options "N" and "L"
<b>Output Impedance</b>		At Vref pin		100		Ohm
<b>Pull range</b>		from nominal F	$\pm 0.4$	$\pm 0.6$		ppm
<b>Deviation slope</b>		Monotonic, positive Monotonic, negative Monotonic, positive		1.0/Vref -0.13 0.12		ppm/V  Slope option "P" Slope option "N" Slope option "L"
<b>Setability</b>	Vc0	@25°C, Fnom.  No internal bias for slope option "L"	Vref/2 $\pm$ 0.5 0 $\pm$ 0.5 5 $\pm$ 0.5			V  Slope option "P" 3* Slope option "N" Slope option "L"

**Notes:**

- \*. For highest operating temperature greater than 70°C the power consumption will be higher (about 20% for 85°C). Values listed are for test in still air environment, the values will go up while testing in the temperature chamber.
- 2\*. For recommended phase noise test, contact factory. It's assumed that phase noise test is performed under static conditions (no vibration), in still air, and care is taken for minimizing EMI.
- 3\*. Longer storage time, especially at low temperatures, may affect both retrace and setability parameters. It may require few days on power for re-stabilization.
- 4\*. If 10MHz is not used it must be terminated into 50 Ohm.
- 5\*. Pin 3 is connected to Vref only for Slope Option "P".
- 6\*. All parameters, unless otherwise specified, are at nominal conditions, i.e.: T=25°C, Nominal Vcc & Nominal Load.
- 7\*. All parameters are for internal reference only. All stability parameters will be determined by reference. With external reference the phase noise may deteriorate (significantly) at Frequency offsets < 1 KHz
- 8\*. For output frequency 100xN, the phase noise typically would be by 20logN higher than the one at 100 MHz, with possible 1 – 2 dB deterioration at higher offset frequencies from the carrier.
- 9\*. If the use of external reference is not intended and not specified (option N) pins ## 6 and 7 will be not connected.

**Environmental and Mechanical**

<b>Operating temp. range</b>	0°C to 70°C Standard, Other options – see chart below
<b>Mechanical Shock</b>	Per MIL-STD-202, 30G, 11ms
<b>Vibration</b>	Per MIL-STD-202, 5G to 2000 Hz
<b>Soldering Conditions</b>	260°C for 10s Max leads only

**Electrical Connections**

<b>Pin Out</b>	Pin #1 = Vcc 10; Pin #2 = Vc; Pin#3 = Vref; Pin#4 = RF OUT 10 MHz Pin #5 = GND; Pin#6 = EXT REF IN (optional); Pin #7 = REF Select (optional); Pin #8 = RF OUT 100xN MHz; Pin #9 = GND; Pin #10 = GND; Pin #11 = GND; Pin #12 = RF OUT 100 MHz; Pin #13 = Vcc 100
----------------	--

## Creating a Part Number

Q - C MR 0 YZ XX - X X X - X

**OCXO**  
Conventional Power  
MFRM

**Supply Voltage**

Code	Specification
0	5V ± 5%

**Temperature Stability 4\***

Code	Specification
17	1x10 <sup>-7</sup>
58	5x10 <sup>-8</sup>
28	2x10 <sup>-8</sup>
18	1x10 <sup>-8</sup>
YZ	Yx10 <sup>-Z</sup>

**Temperature Range**

Code	In 5°C steps
First letter	Lowest temperature from A = -40°C
Second letter	Highest temperature to Z = 85°C
Examples	
IS	0°C to 50°C
GU	-10°C to 60°C
EW	-20°C to 70°C

**Environmental**

Code	Specification
L	Contains a level of lead that is in excess of RoHS directive and is not designed for reflow
R	RoHS compliant, not designed for reflow

**Connector Option 100xN MHz**

Code	Specification
P	Pin
S	SMB

**External Reference Option**

Code	Specification
E	Included
N	Not Available

**Deviation slope**

Code	Specification
P	Positive, 0 to Vref
N	Negative, -4 to 4V
L	Positive, 0 to 10 V

**Temperature Code Table**

Letter	Temp °C	Letter	Temp °C	Letter	Temp °C	Letter	Temp °C	Letter	Temp °C	Letter	Temp °C
<b>A</b>	-40	<b>F</b>	-15	<b>K</b>	10	<b>P</b>	35	<b>U</b>	60	<b>Z</b>	85
<b>B</b>	-35	<b>G</b>	-10	<b>L</b>	15	<b>Q</b>	40	<b>V</b>	65		
<b>C</b>	-30	<b>H</b>	-5	<b>M</b>	20	<b>R</b>	45	<b>W</b>	70		
<b>D</b>	-25	<b>I</b>	0	<b>N</b>	25	<b>S</b>	50	<b>X</b>	75		
<b>E</b>	-20	<b>J</b>	5	<b>O</b>	30	<b>T</b>	55	<b>Y</b>	80		