



Contact Us



About NEL



Products



ネル社について

Design-in Our BEST Ultra Low Phase Noise OCXO

In a 36 x 27 mm “Europack”

Features

- SC-cut crystal
- High Stability
- Outstanding ADEV
- Improved Ultra Low Phase Noise
 Extraordinary (E) -91 dBc/Hz at 0.1 Hz
 -123 dBc/Hz at 1 Hz
 -151 dBc/Hz at 10 Hz
 -172 dBc/Hz on the floor
- Extraordinary Low ADEV




Applications

- Instrumentation
- GPS
- COTS/Dual use
- Telecommunication Systems
- Radar


Specifications

Evaluation Unit? Contact NEL

10 MHz Output Frequency

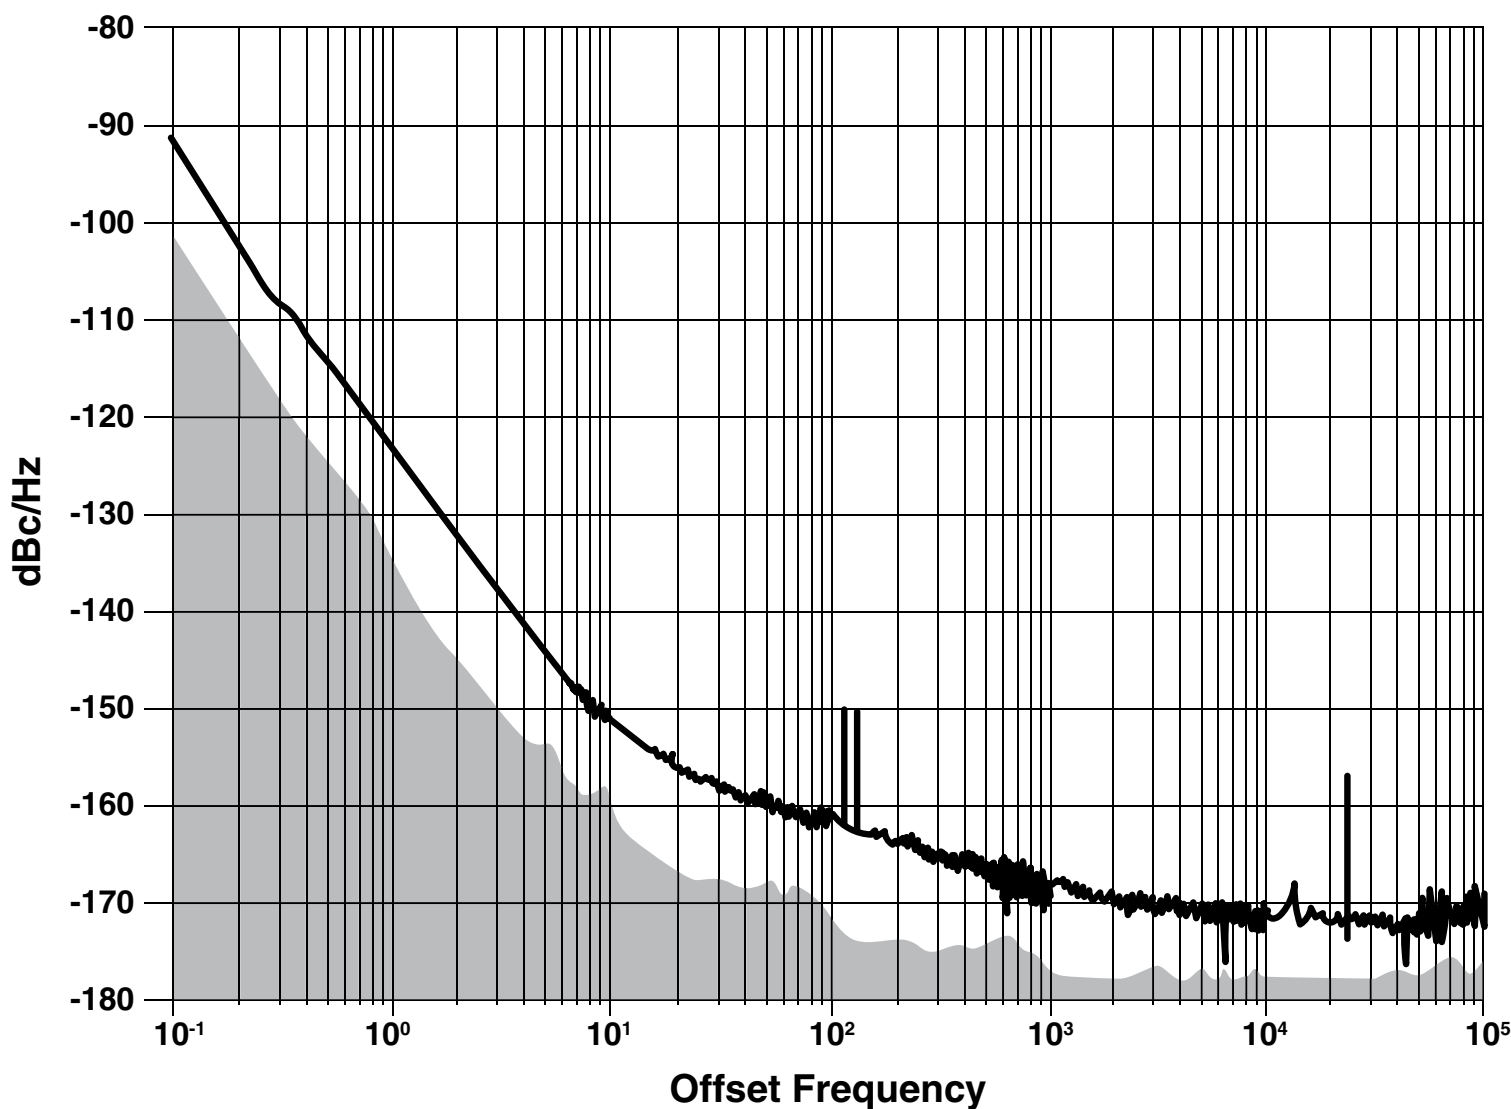

ADEV

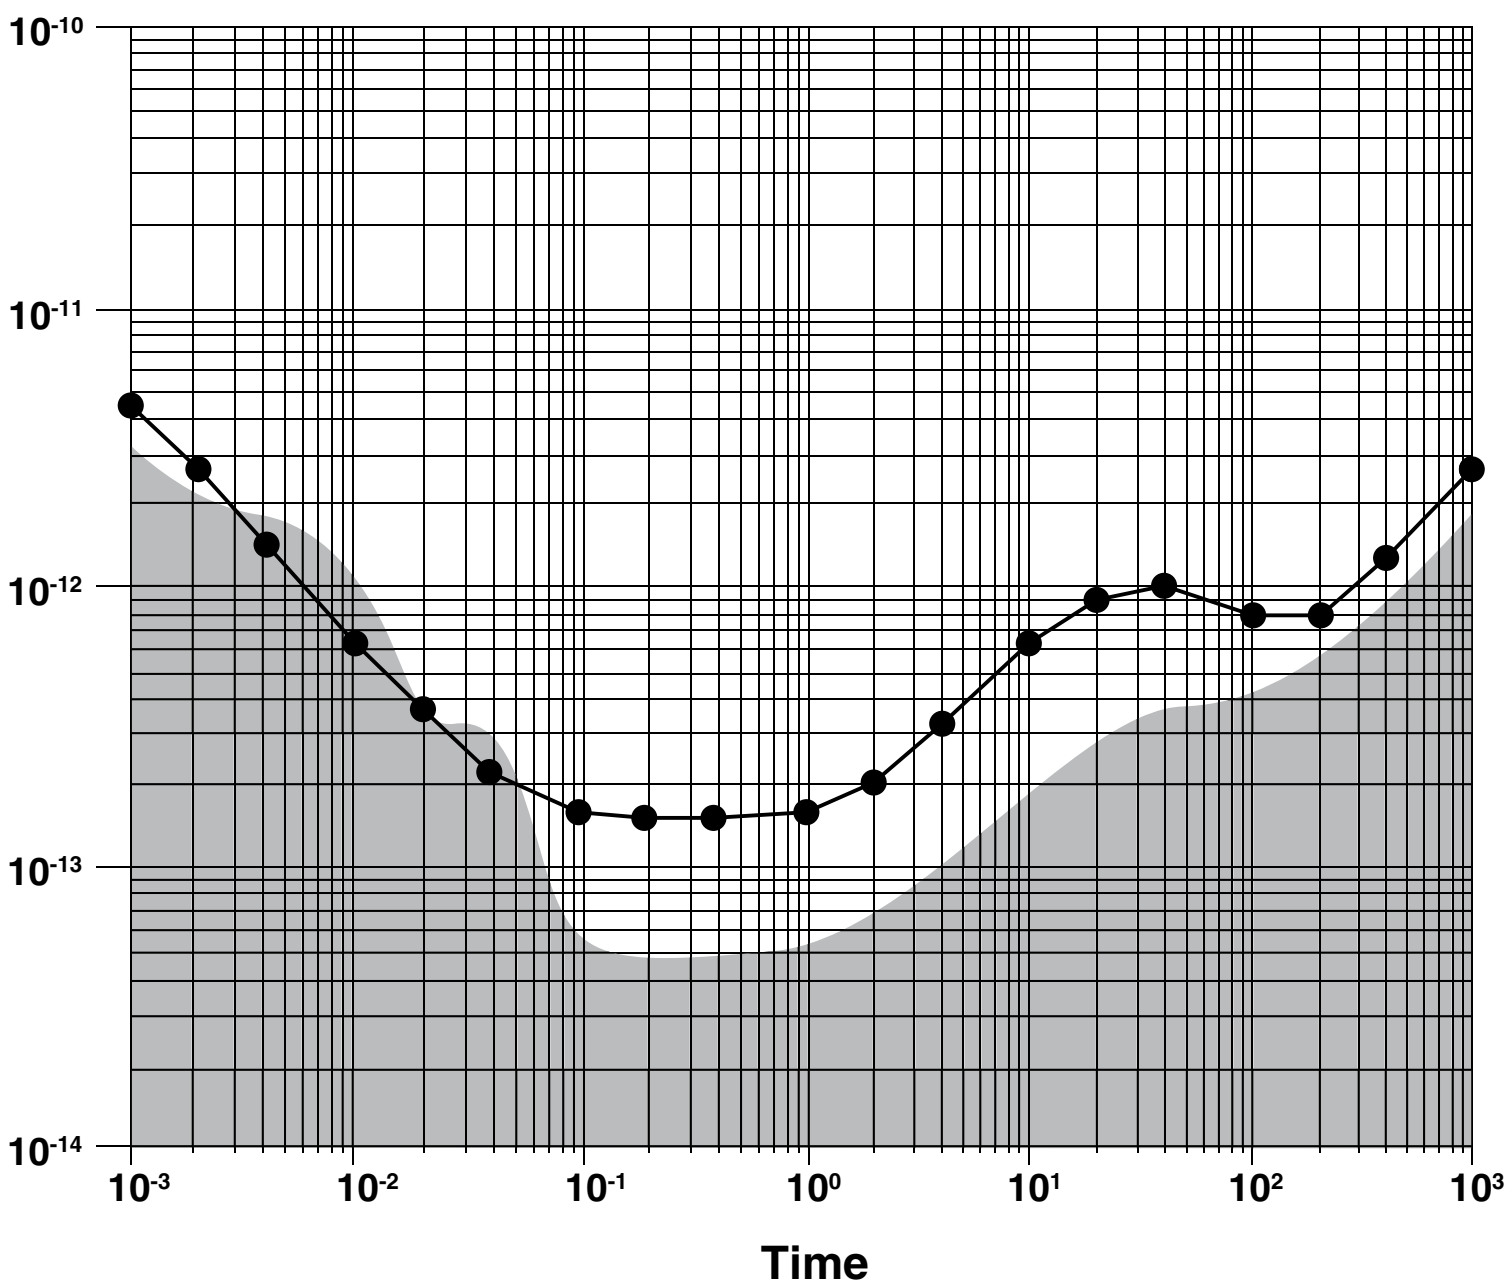

Follow us on LinkedIn for updates on industry news!