

# The Best Ultra Low Phase Noise OCXO

In a 36 x 27 mm “Europack”

## Features

- SC-cut crystal
- High Stability
- Outstanding ADEV
- Improved Ultra Low Phase Noise  
Extraordinary (E) -91 dBc/Hz at 0.1 Hz  
-123 dBc/Hz at 1 Hz  
-151 dBc/Hz at 10 Hz  
-172 dBc/Hz on the floor
- Extraordinary Low ADEV




## Applications

- Instrumentation
- GPS
- COTS/Dual use
- Telecommunication Systems
- Radar


Specifications

Evaluation Unit? Contact NEL

## 10 MHz Output Frequency

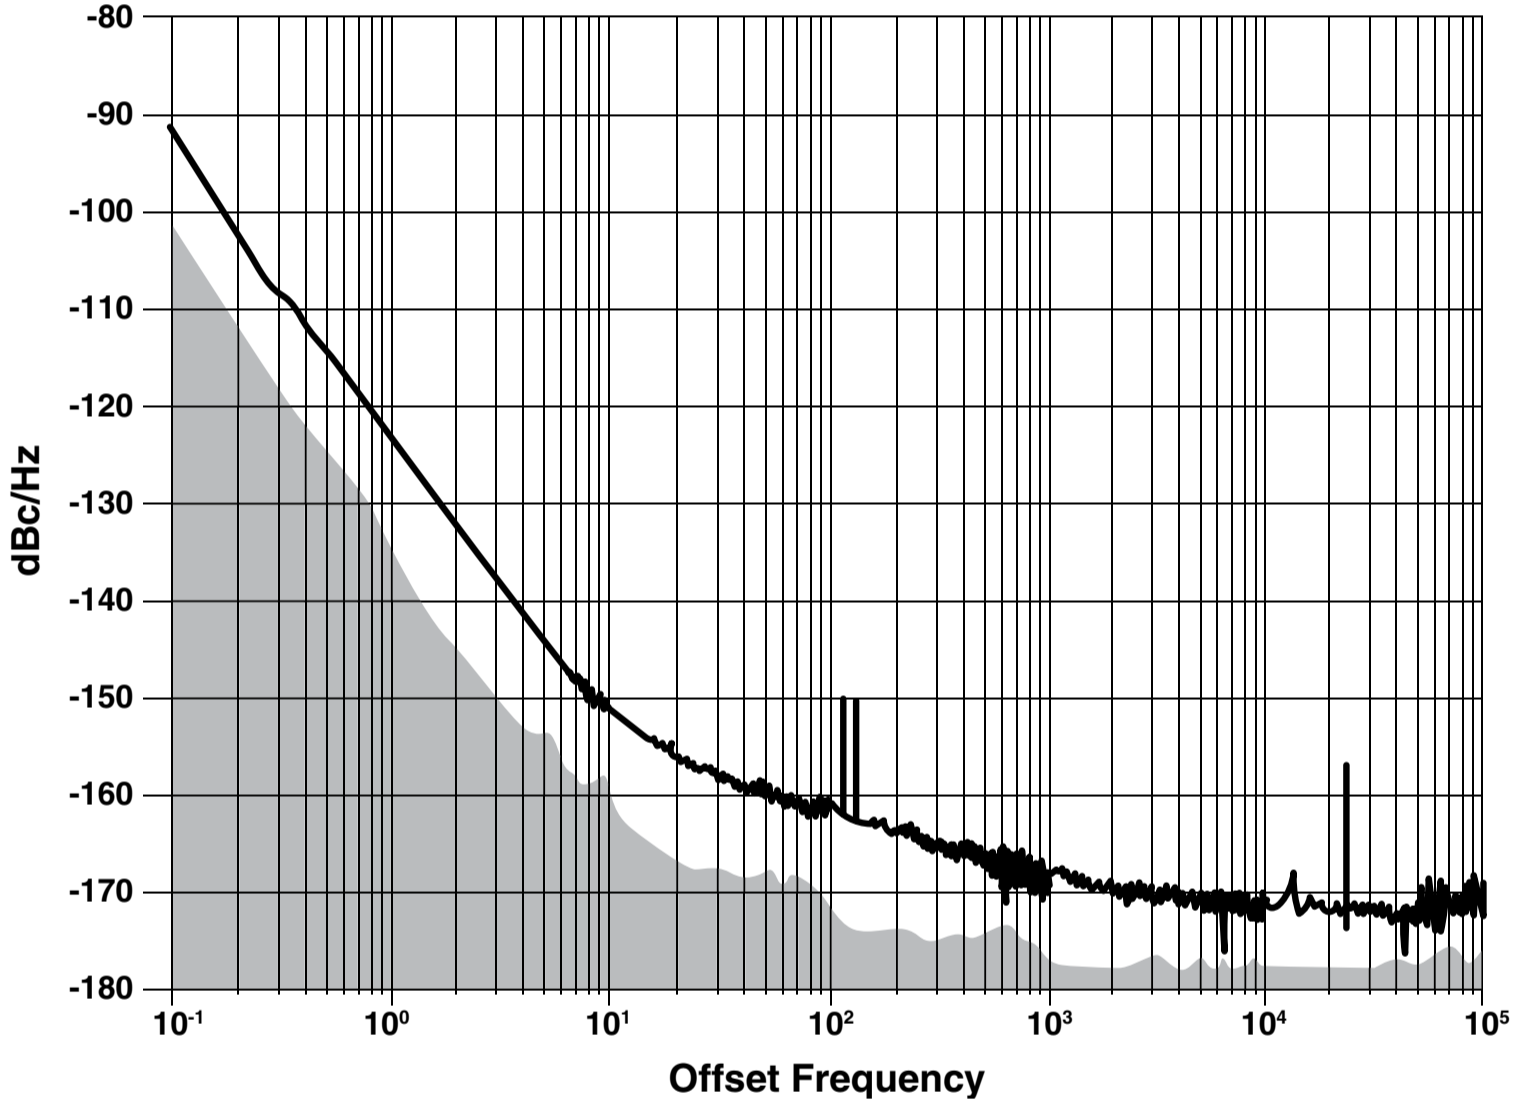

## ADEV

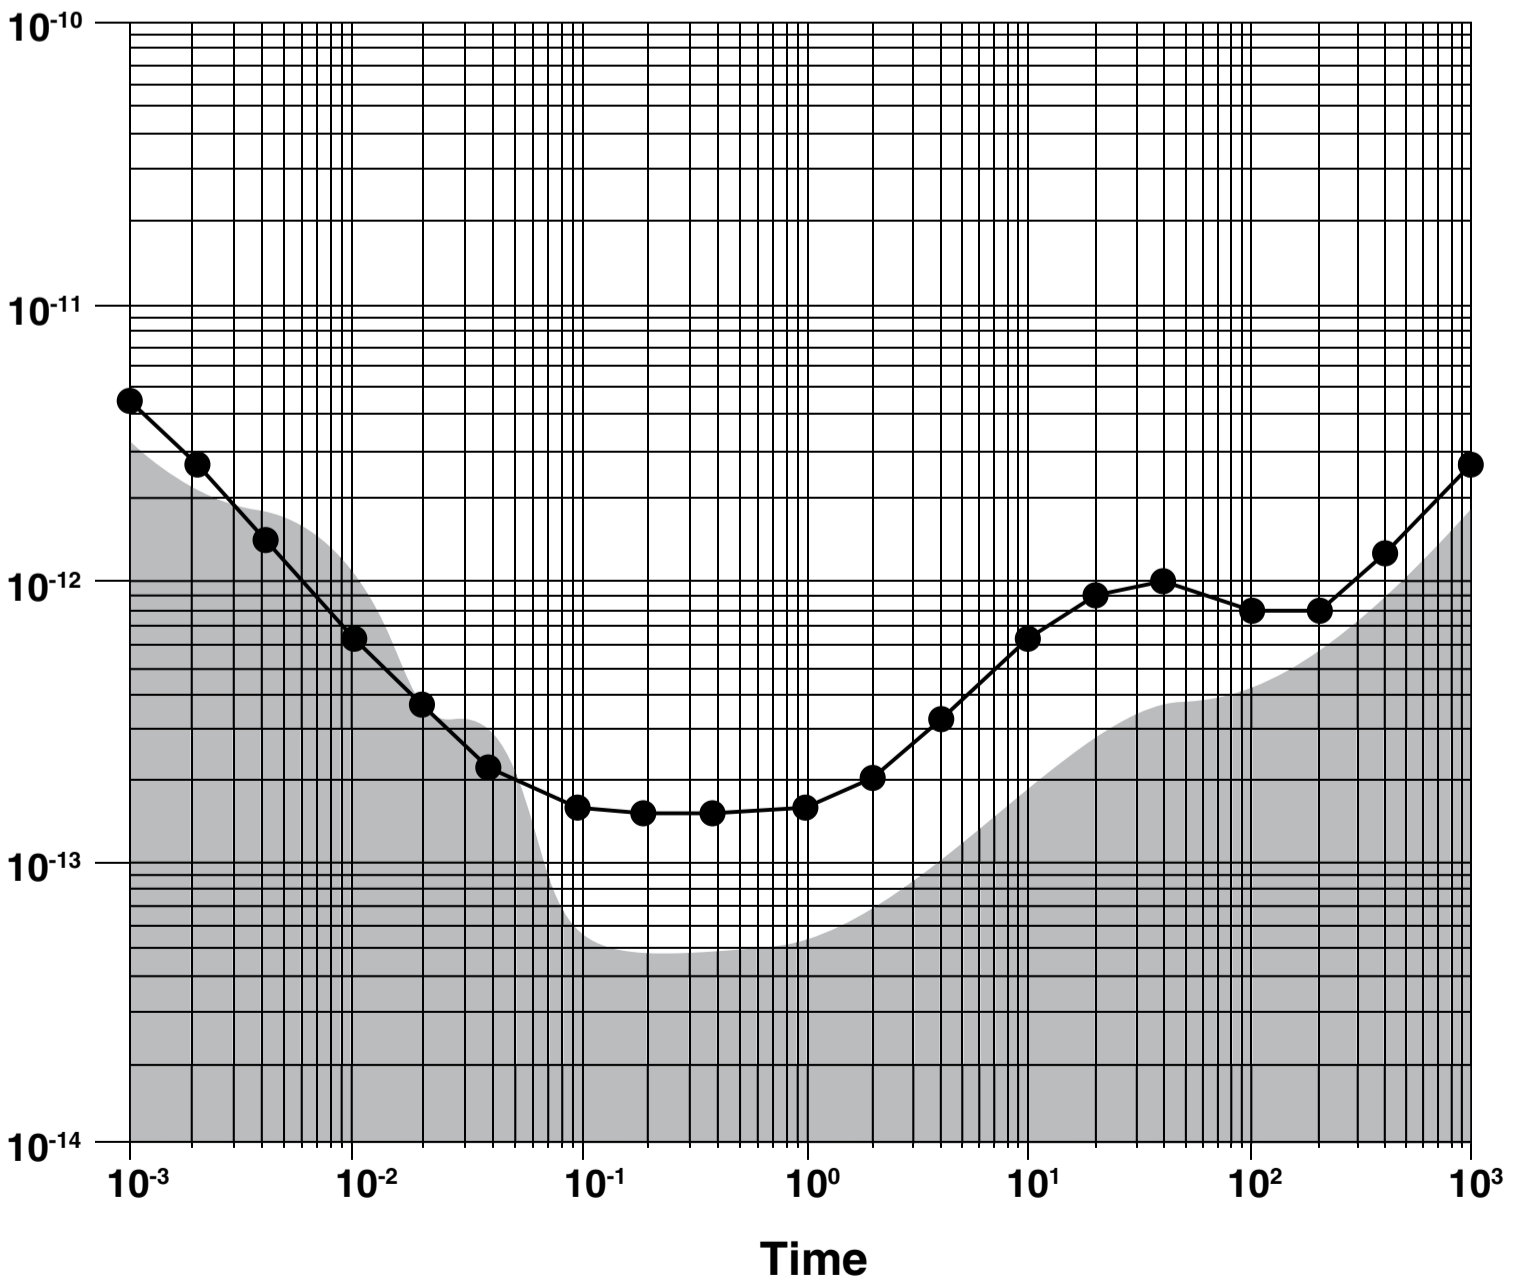

Follow us on LinkedIn for updates on industry news!