


FREQUENCY CONTROLS, INC.

Your Silent Partner®



The Best Ultra Low Phase Noise OCXO

In a 36 x 27 mm “Europack”

Features

- SC-cut crystal
- High Stability
- Outstanding ADEV
- Improved Ultra Low Phase Noise
Extraordinary (E) -91 dBc/Hz at 0.1 Hz
-123 dBc/Hz at 1 Hz
-151 dBc/Hz at 10 Hz
-172 dBc/Hz on the floor
- Extraordinary Low ADEV
- Available in SMD Package 41 x 30 mm with Optional Oscillator Shut Down and Oven Ready Functions




Applications

- Instrumentation
- GPS
- COTS/Dual use
- Telecommunication Systems
- Radar
- Satellite Communications


Specifications

Evaluation Unit? Contact NEL

10 MHz Output Frequency

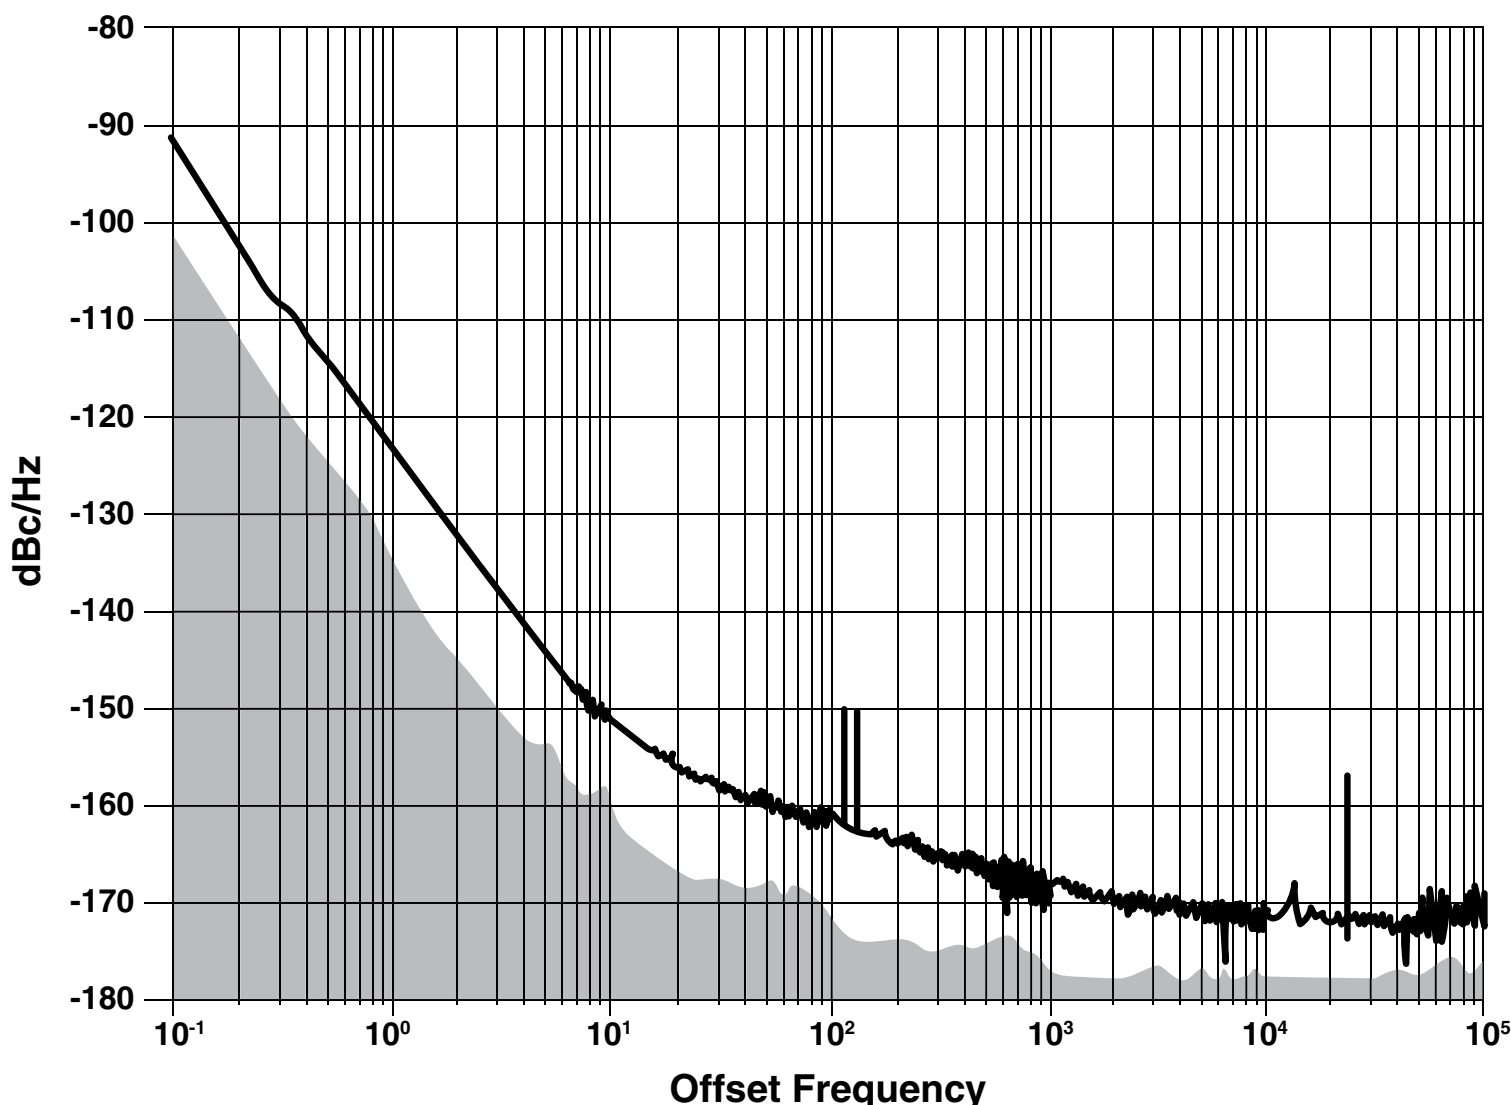

ADEV

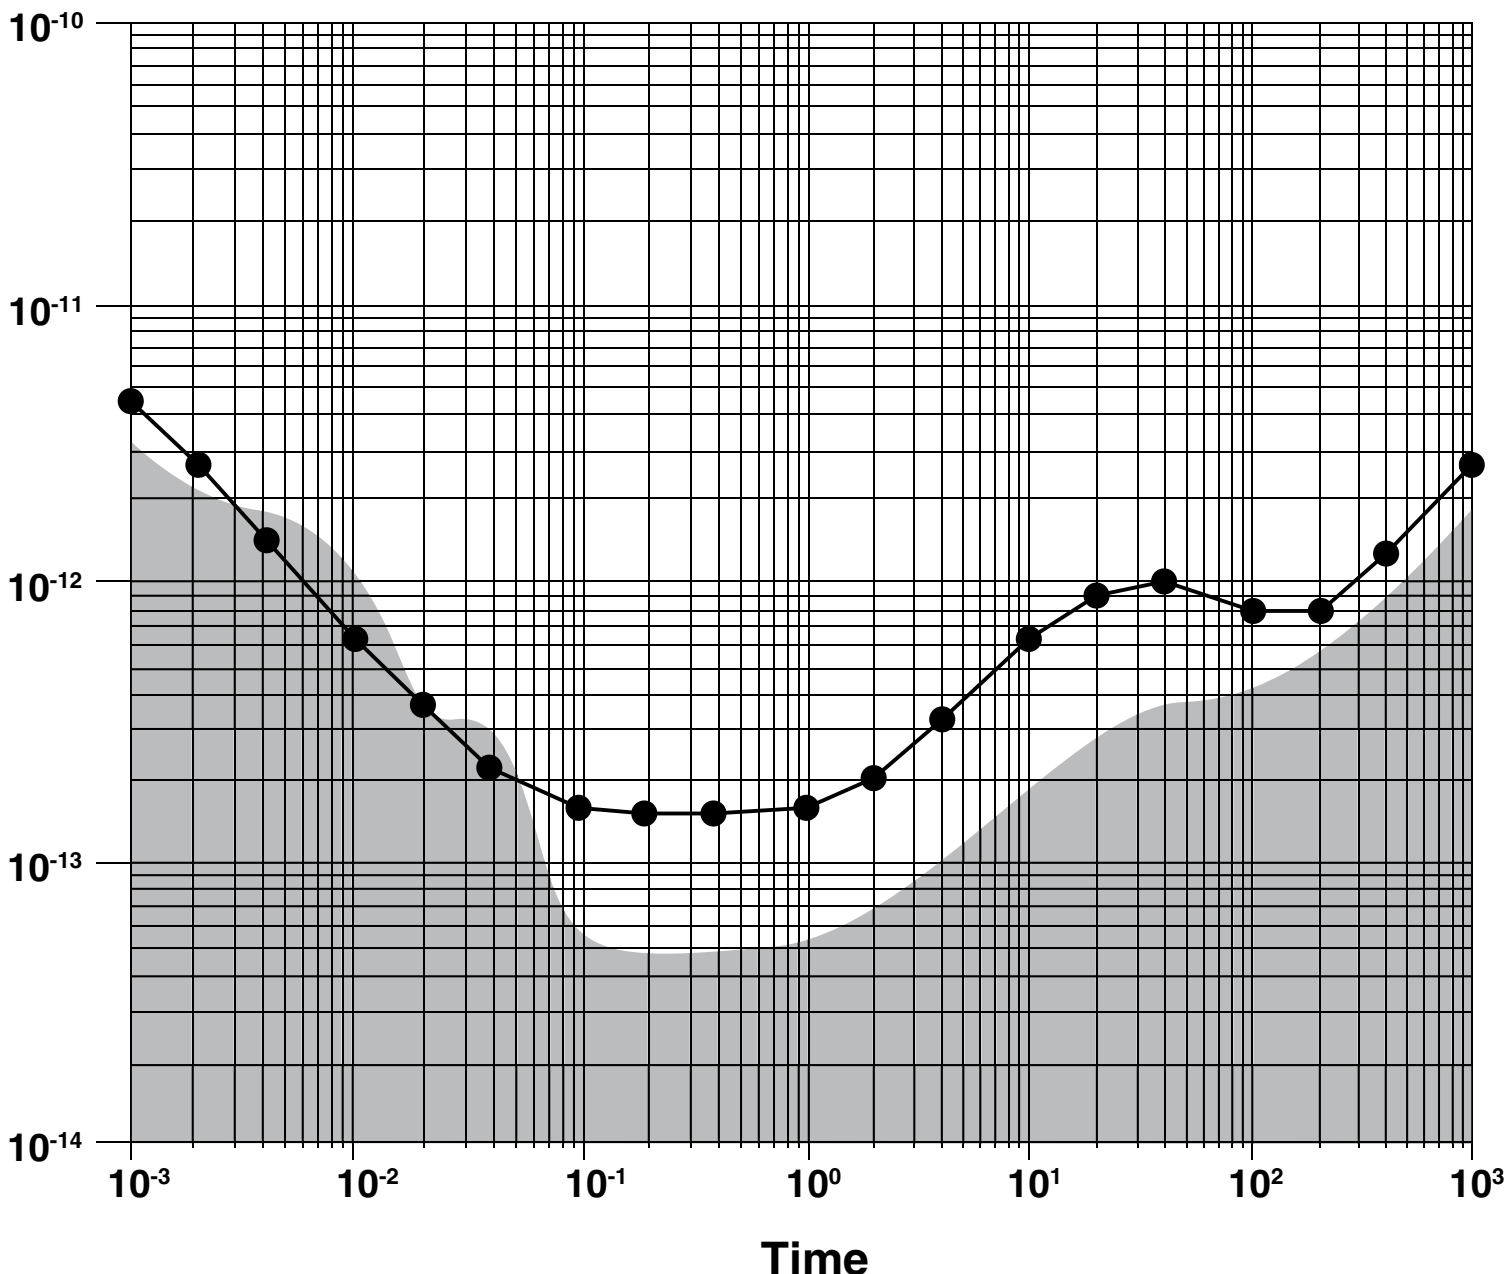

Follow us on LinkedIn for updates on industry news!