

**FREQUENCY
CONTROLS, INC.**
Your Silent Partner®



Contact Us

About NEL

Products

ネル社について

Extraordinary Low Phase Noise 1 GHz OCXO

In a 36 x 27 mm “Europack”

This device is based on lower frequency SC-cut OCXO with Low Noise analog multiplier to achieve frequency range of 500 MHz to 1,300 MHz.



Features

- Fast Cold Start Option available
- UHF
- Ultra Low Phase Noise
- Low Spurious
- +12 dBm Sine Wave output

Applications


- Instrumentation
- GPS
- COTS/Dual use
- Telecommunication Systems
- Radar

[Specifications](#)

[Evaluation Unit? Contact NEL](#)

1 GHz Output Frequency

NOISE XT

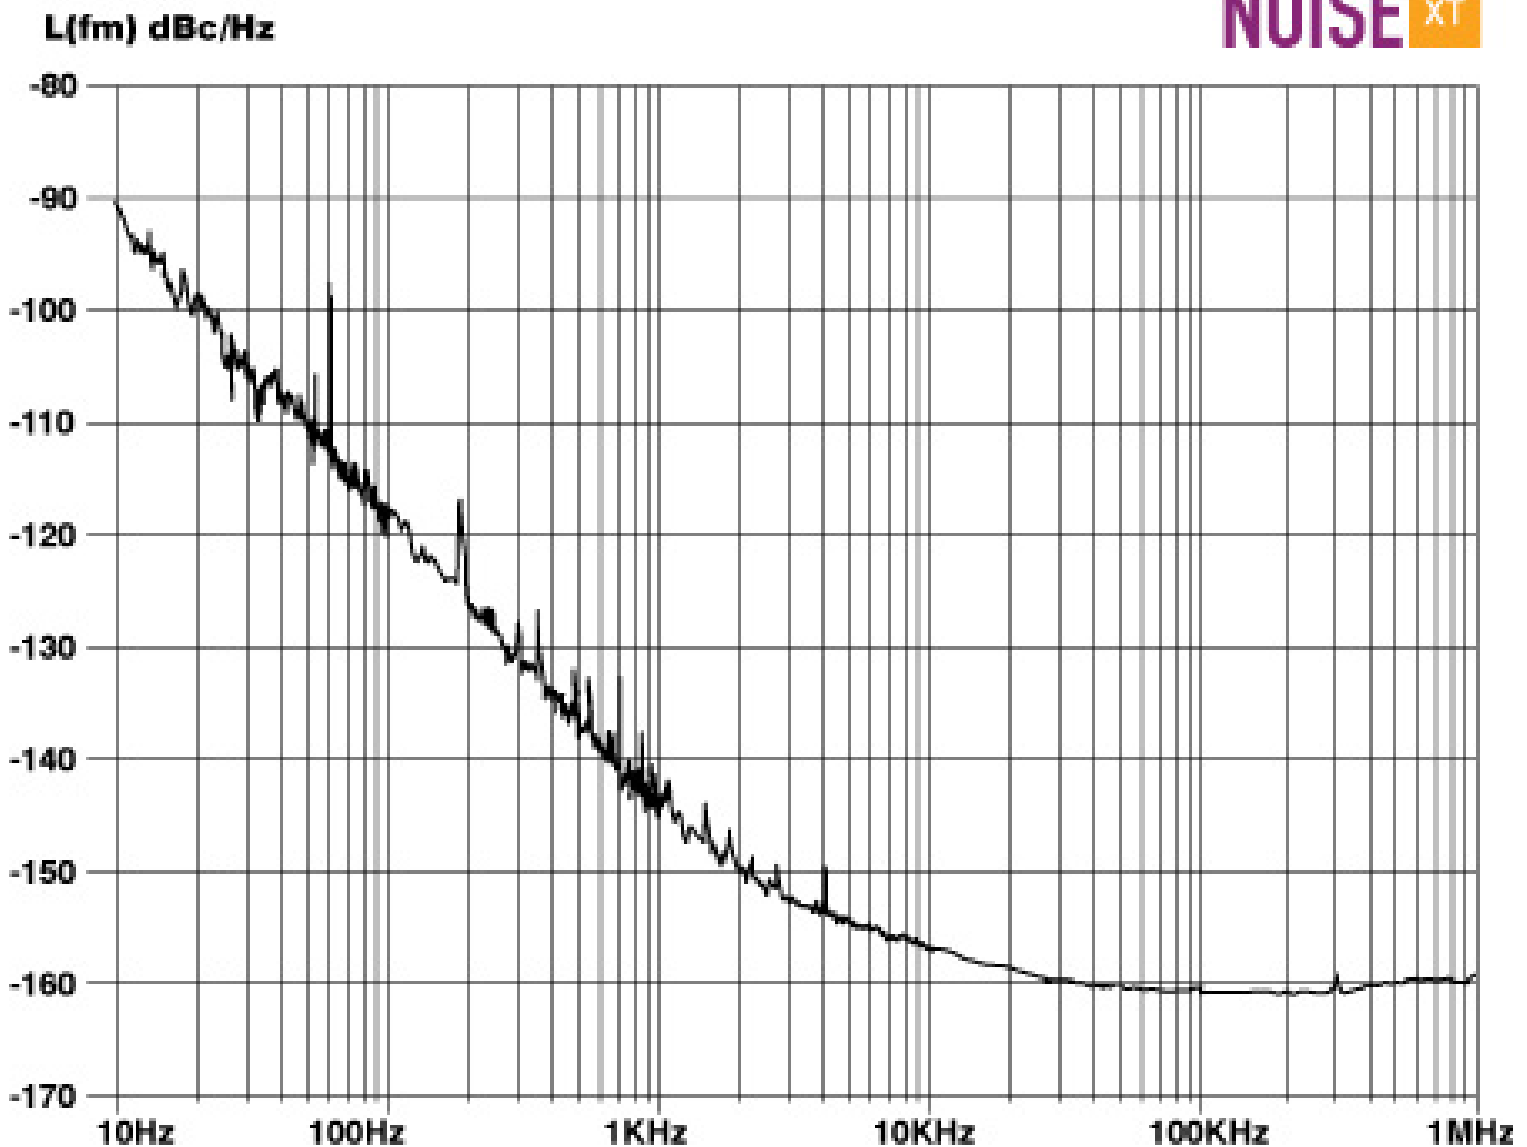

[Follow us](#) on LinkedIn for updates on industry news!