

**FREQUENCY CONTROLS, INC.**

Your Silent Partner®

Subscribe to our monthly email



# Precision Ultra Low Phase Noise OCXO

Available in a 36x27 mm “Europack” or 41x30 mm SMD package

## Features

- SC-cut crystal
- High stability
- Low aging
- Excellent Allen Deviation
- Close to the carrier phase noise

The SMD option includes an OSC shut down, oven ready feature, and 12V supply.

## Applications

- Instrumentation
- Radar
- COTS/Dual use
- Satellite Communications
- Reference




“Europack” Specifications


SMD Package Specifications

Evaluation Unit? Contact NEL

## 10 MHz Output Frequency

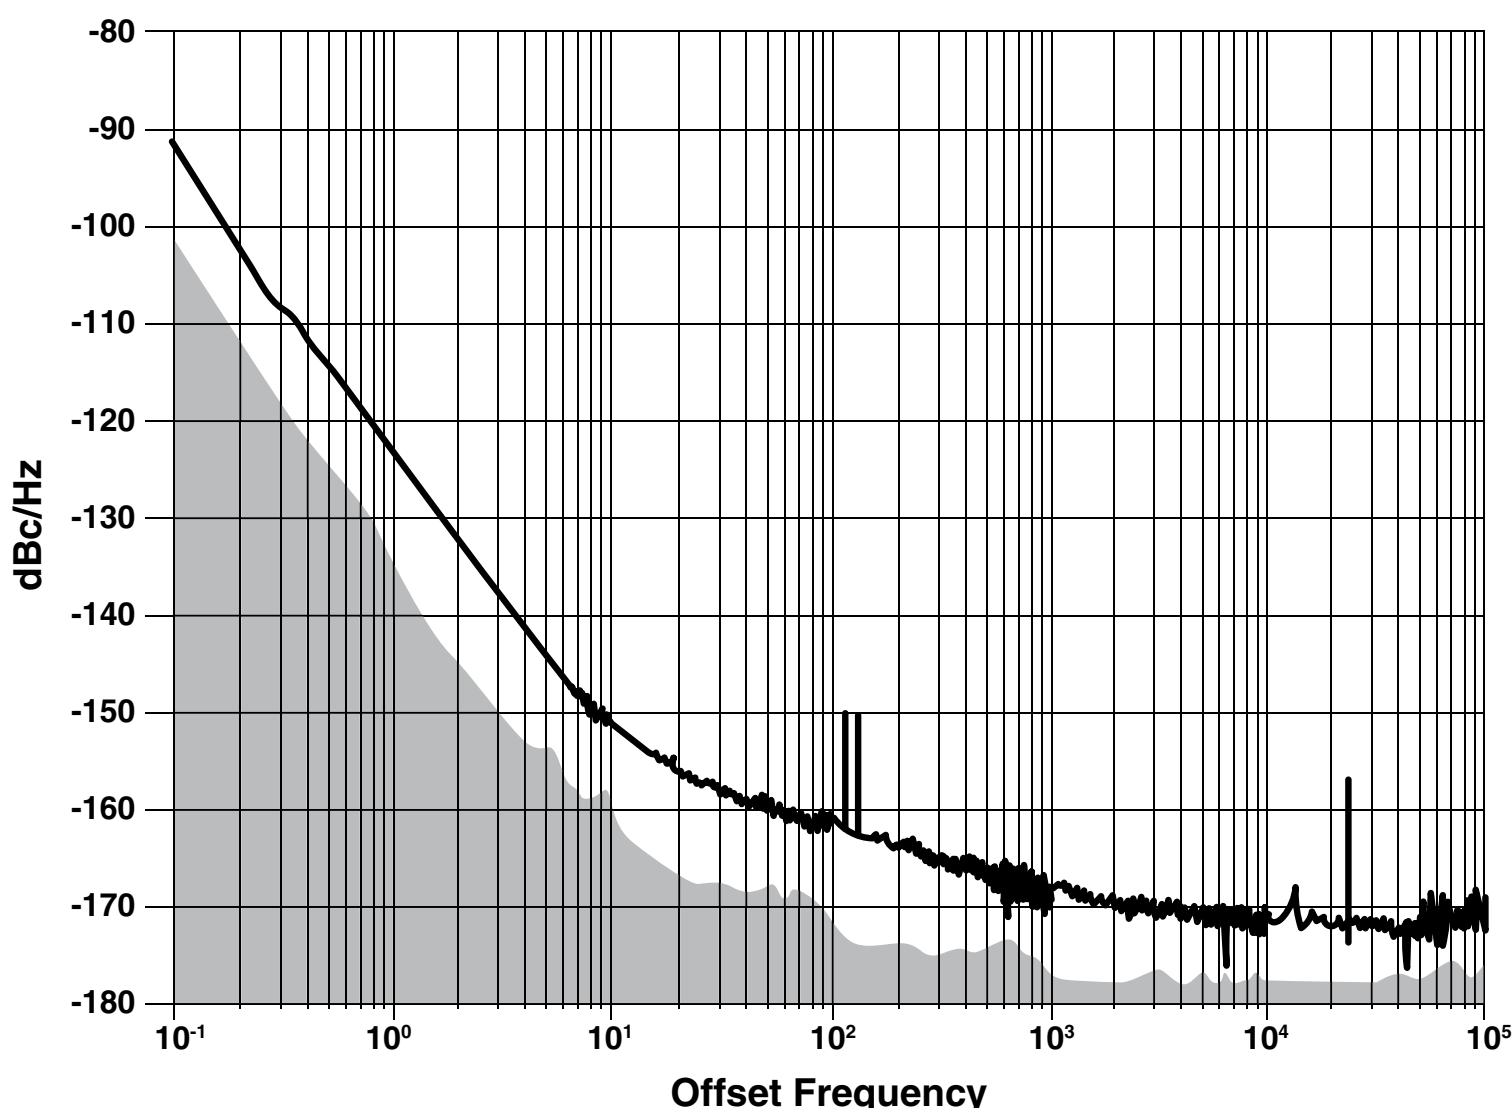

## ADEV

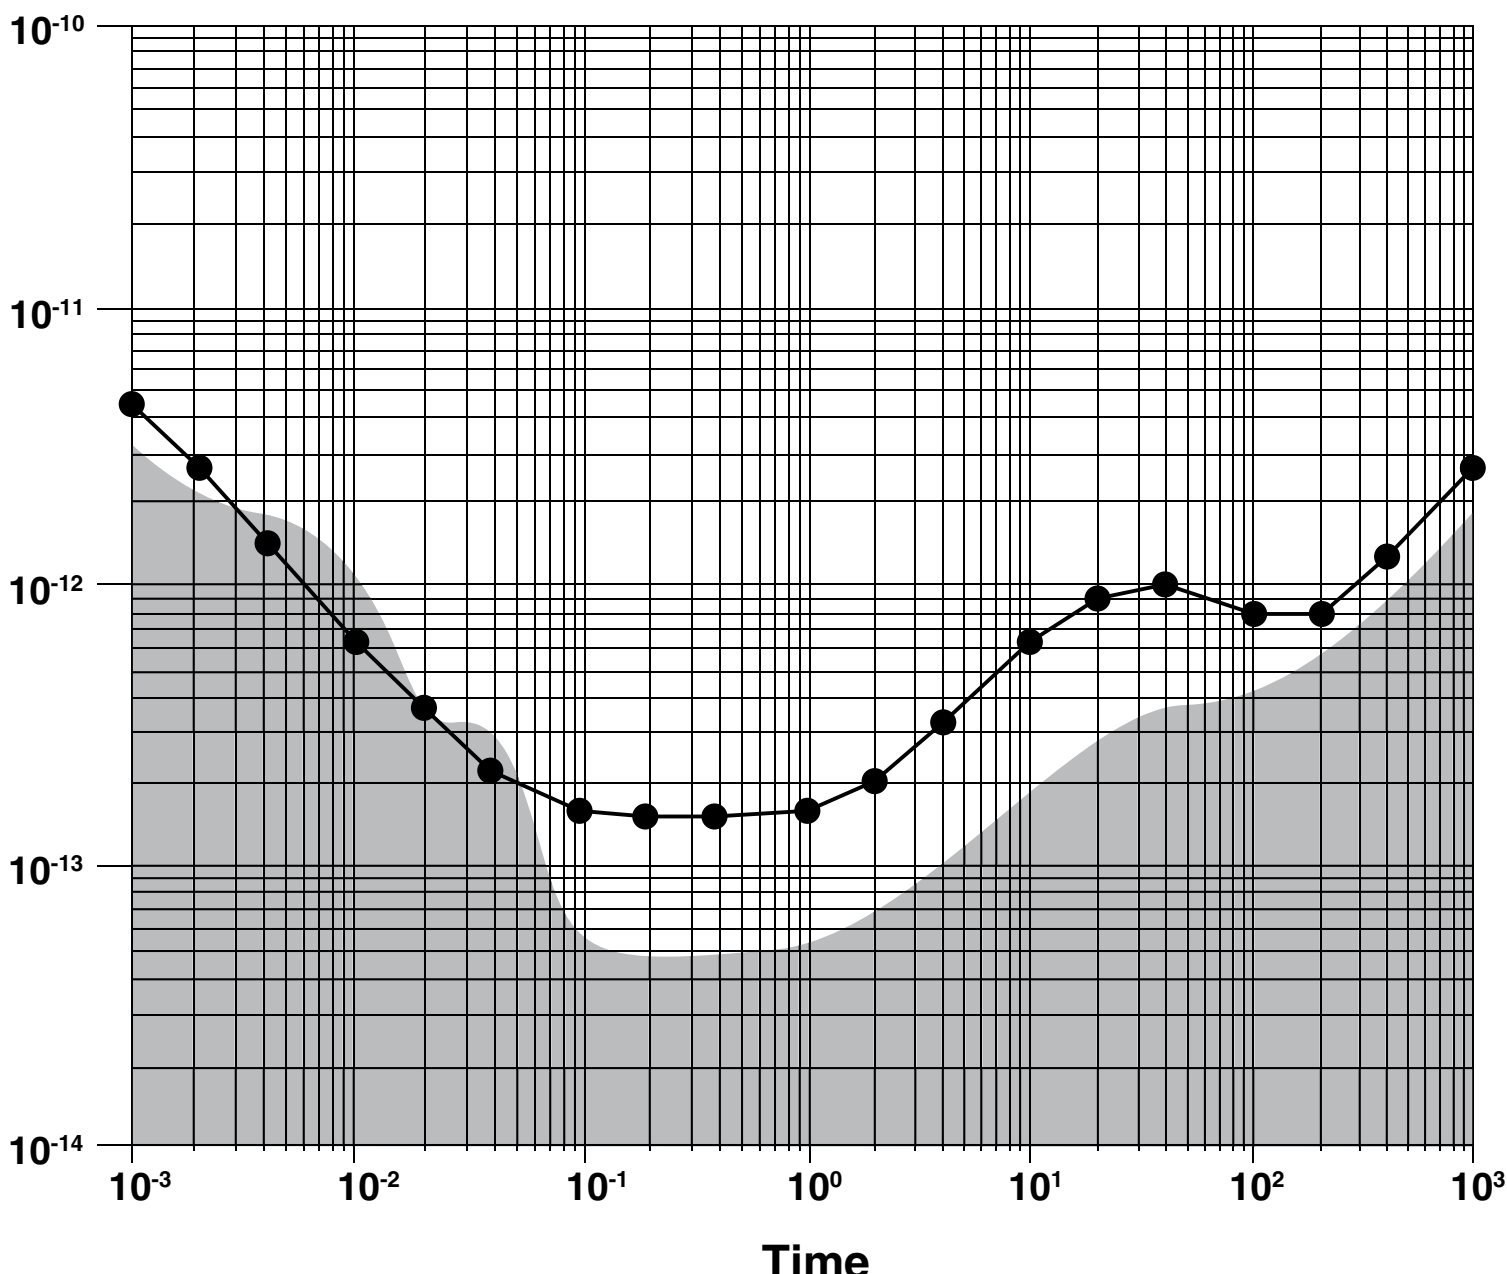

Follow us on LinkedIn for updates on industry news!

NEL Frequency Controls, Inc.

357 Beloit Street • Burlington, WI 53105

Phone: 262.763.3591 • Fax: 262.763.2881 • Email: [sales@nelfc.com](mailto:sales@nelfc.com)

[www.nelfc.com](http://www.nelfc.com)