

**FREQUENCY  
CONTROLS, INC.**

Your Silent Partner®



Contact Us



About NEL



Products



ネル社について

# Extraordinary Low Phase Noise 1 GHz OCXO

## In a 36x27 mm “Europack”

This device is based on lower frequency SC-cut OCXO with Low Noise analog multiplier to achieve frequency range of 500 MHz to 1.3 GHz.



### Features

- Fast Cold Start Option available
- UHF
- Ultra Low Phase Noise
- Low Spurious
- +12 dBm Sine Wave output
- Standard frequencies: 1.000 GHz and 1.280 GHz

### Applications


- Instrumentation
- GPS
- Microwave/RF
- COTS/Dual use
- Radar
- Synthesizers

Specifications

Evaluation Unit? Contact NEL

## 1 GHz Output Frequency

**NOISE** XT

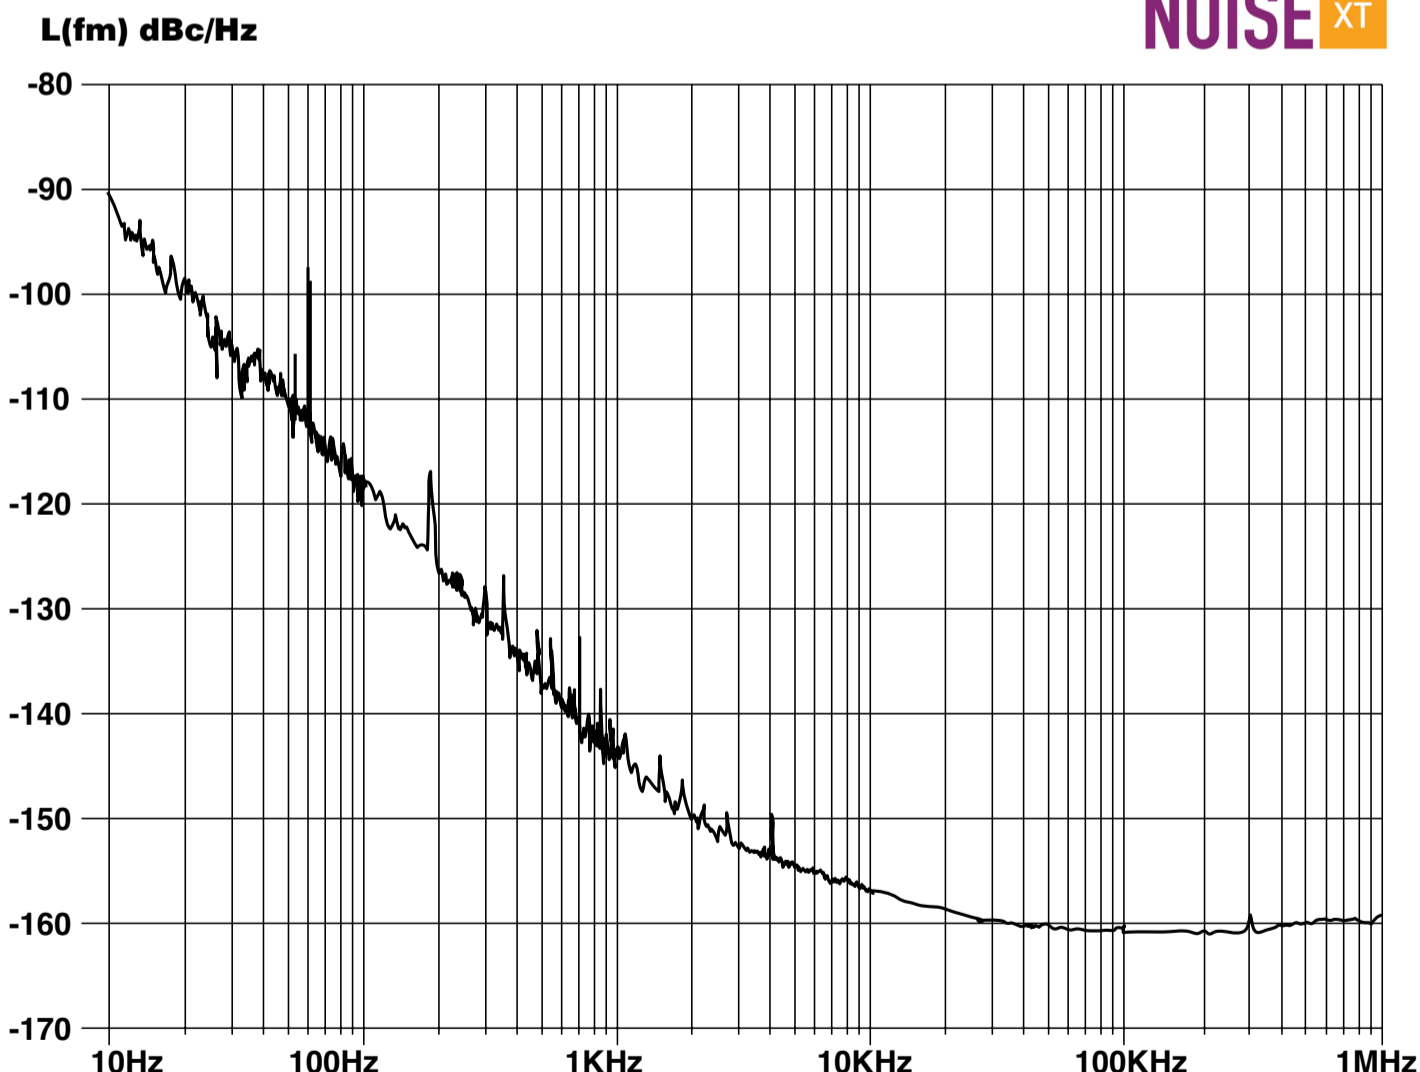

Follow us on LinkedIn for updates on industry news!