


**O-CE8-XYZXX-X-X-XX-X****Precision Ultra Low Phase Noise OCXO in 36x27 mm “Europack” with OSC Disable and Oven Alarm features for Instrumentation****Product Data Sheet****Features**

- SC-cut crystal
- High Stability
- Low Aging
- Ultra Low Phase Noise Option:
 

Standard(L)	-140dBc/Hz at 10Hz; -172dBc/Hz on the floor
Premium(P)	-143dBc/Hz at 10Hz; -172dBc/Hz on the floor
Ultimate(U)	-145dBc/Hz at 10Hz -172dBc/Hz on the floor
Extraordinary(E)	-120 dBc/Hz at 1 Hz -148 dBc/Hz at 10 Hz -172 dBc/Hz on the floor

**Applications**

- Instrumentation
- Telecommunication Systems
- Data Communications
- GPS
- COTS/Dual use

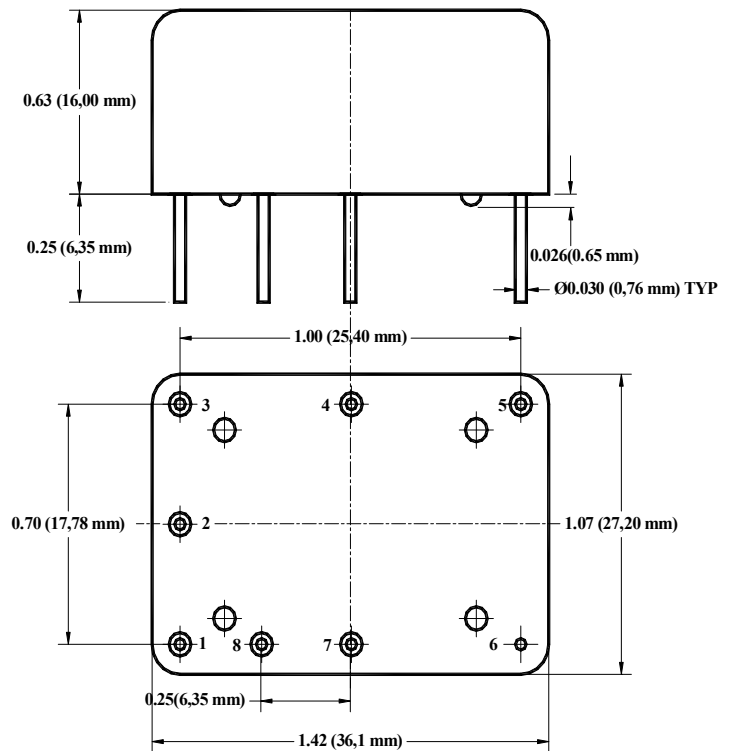

Rev. J

Parameter	Symb	Condition	Min	Typ	Max	Unit	Note	
<i>Absolute Maximum Ratings</i>								
<b>Input Break Down Voltage</b>	Vcc	12 V supply 5 V supply	-0.5 -0.5		13.0 5.5	V		
<b>Storage temper.</b>	Ts		-40		85	°C		
<b>Control Voltage</b>	Vc		-1 -5 -1		5.5 5 11	V	Slope option $\delta P\delta$ Slope option $\delta N\delta$ Slope option $\delta L\delta$	
<i>Electrical (4)</i>								
<b>Frequency</b>	F		8	10.000	13	MHz		
<b>Frequency stability</b>	$\Delta F/F$	vs. Temp.		$\pm 10$		ppb	See chart below	
		vs. Supply		0.2	0.3	ppb/10% Vcc		
<b>Aging</b>		per day per year, first year second year		5E-10 1E-7 3E-8			after 30 days 5E-8 available	
<b>Allan Deviation</b>		0.1s 1.0 s 10 s		5E-13 2E-12 5E-12			Premium version, option P	
	<b>SSB Phase Noise (achieved after 10 minutes warm-up)</b>	1Hz 10 Hz 100 Hz 1 KHz 10 KHz 100 KHz			-110 -140 -155 -162 -170 -172	dBc/Hz	Standard version, option L	
		1Hz 10 Hz 100 Hz 1 KHz 10 KHz 100 KHz			-112 -143 -155 -162 -170 -172		Premium version, option P	
1Hz 10 Hz 100 Hz 1 KHz 10 KHz 100 KHz				-115 -146 -156 -163 -170 -172		Ultimate version, Option U		
1Hz 10 Hz 100 Hz 1 KHz 10 KHz 100 KHz				-120 -148 -160 -168 -170 -172		Extraordinary version, option E, available with slope options N or L		
<b>Retrace</b>		After 30 minutes			$\pm 10$	ppb	24 Hours off 3*	
<b>G-sensitivity</b>		worst direction			$\pm 1.0$	ppb/G		
<b>Input Voltage</b>	Vcc		4.75 11.4	5.0 12.0	5.25 12.6	V	See chart below to specify	
<b>Power consumption</b>	P	steady state, 25°C steady state, -30°C start-up @ -30°C		1.2 1.5 2.5	1.5 3.2	W	Still air	
<b>Spectral Purity</b>		Spurious Harmonics/Sine		-35	-80 -30	dBc	Non-harmonic	
<b>Load</b>		Internally AC-coupled 50 Ohm						
<b>Warm-up time</b>	$\tau$	to 0.1ppm accuracy to 10ppb accuracy		3	5 10	minutes	Off time <24 hrs Aging rate was reached	
<b>Output Waveform</b>		HCMOS/TTL compatible or Sinewave						
<b>Output Power</b>			+10	+13		dBm	Output Code S	
<b>Logic 1 (CMOS)</b>	Voh		0.7 Vref			V	Output Code T	

All parameters for 10 MHz

<b>Logic 0 (CMOS)</b>	Vol				0.1 Vref	V	Output Code T
<b>Control voltage</b>	Vc	No internal bias	0 -4.0 0		Vref 4.0 10	V	Slope option $\delta P\delta$ Slope option $\delta N\delta$ Slope option $\delta L\delta$
<b>Reference Voltage</b>	Vref	Vcc = 12V Vcc = 5V		5 or 4.5 4.5		V	N/A w/slope options $\delta N\delta$ and $\delta L\delta$
<b>Output Impedance</b>		At Vref pin		100		Ohm	
<b>Pull range</b>		from nominal F	$\pm 0.4$	$\pm 0.6$		ppm	
<b>Deviation slope</b>		Monotonic, positive Monotonic, negative Monotonic, positive		1.0/Vref -0.13 0.12		ppm/V	Slope option $\delta P\delta$ Slope option $\delta N\delta$ Slope option $\delta L\delta$
<b>Setability</b>	Vc0	@25°C, Fnom.  No internal bias for slope option $\delta L\delta$		Vref/2 $\pm$ 0.5 0 $\pm$ 0.5 5 $\pm$ 0.5		V	Slope option $\delta P\delta$ 3* Slope option $\delta N\delta$ Slope option $\delta L\delta$
<b>Oven Ready</b>		V pin #7	3.3		0.5	V	Ready Not Ready
<b>Output Enable</b>		CMOS Logic $\delta 1\delta$ (4.5V > V > 2.5) or floating Logic $\delta 0\delta$ (V < 0.5V)		Enabled  Disabled		V	Pout < -30 dBm
<b>Modulation Bandwidth</b>	Fm		DC		1	KHz	Note 5

Notes:

- \*. For highest operating temperature higher than 70°C the power consumption will be higher (about 20% for 85°C). Values listed are for test in still air environment, the values will go up while testing in the temperature chamber.
- 2\*. It is recommended to specify Slope option  $\delta N\delta$  for Ultimate Phase noise performance. For recommended phase noise test, contact factory. It is assumed that phase noise test is performed under static conditions (no vibration), in still air, and care is taken for minimizing EMI.
- 3\*. Longer storage time, especially at low temperatures, may affect both retrace and setability parameters. It may require few days on power for re-stabilization.
- 4. All parameters, unless otherwise specified, are at nominal conditions, ie: T=25°C, Nominal Vcc & Nominal Load.
- 5. Older and stock units may have MBW of 150 Hz Max.
- 6\*. Pin 2 is connected to Vref only for Slope Option  $\delta P\delta$ .

**Environmental and Mechanical**

<b>Operating temp. range</b>	-30°C to 70°C Standard, Other options $\delta$ see chart below
<b>Mechanical Shock</b>	Per MIL-STD-202, 30G, 11ms
<b>Vibration</b>	Per MIL-STD-202, 5G to 2000 Hz
<b>Soldering Conditions</b>	260°C for 10s Max leads only

**Electrical Connections**

<b>Pin Out</b>	Pin #1-Vc ; Pin#2-Vref or N/C (6*), Pin #8 $\delta$ For internal use $\delta$ do not connect; Pin #3 $\delta$ Vcc; Pin #4 $\delta$ Output Enable; Pin #5 $\delta$ RF Output; Pin #6 $\delta$ GND; Pin #7 $\delta$ Oven Ready indicator
----------------	--

## Creating a Part Number

**Q** - **C** **E8** **X** **X** **YZ** **XX - X - X - XX - X** **FREQ**  
**OCXO** |  
**Conventional Power**

**Package Code**  
 Europack 36x27mm, 8 pin

**Supply Voltage**

Code	Specification
0	5V ± 5%
F	12V ± 5%

**Output**

Code	Specification
T	CMOS/TTL
S	Sinewave

**Temperature Stability**

Code	Specification
17	1x10 <sup>-7</sup>
58	5x10 <sup>-8</sup>
28	2x10 <sup>-8</sup>
18	1x10 <sup>-8</sup>
59	5x10 <sup>-9</sup>
YZ	Yx10 <sup>-Z</sup>

**Temperature Range**

Code	In 5°C steps **
First letter	Lowest temperature from A = -40°C
Second letter	Highest temperature to Z = 85°C
Examples	
AZ	-40°C to 85°C
GU	-10°C to 60°C
EW	-20°C to 70°C

**\*\*Temperature Code Table**

Letter	Temp °C	Letter	Temp °C	Letter	Temp °C	Letter	Temp °C	Letter	Temp °C	Letter	Temp °C
A	-40	F	-15	K	10	P	35	U	60	Z	85
B	-35	G	-10	L	15	Q	40	V	65		
C	-30	H	-5	M	20	R	45	W	70		
D	-25	I	0	N	25	S	50	X	75		
E	-20	J	5	O	30	T	55	Y	80		

Not all combinations are available. Consult Factory.

**Environmental**

Code	Specification
L	Contains a level of lead that is in excess of RoHS directive and is not designed for reflow
R	RoHS compliant, not designed for reflow

**Aging**

Insert Value per day times 1E-10	
Examples	
05	5E-10 = 0.5 ppb/day
10	1E-9 = 1 ppb/day

**Phase Noise (See Table)**

Code	Specification
L	Standard
P	Premium
U	Ultimate
E	Extraordinary

**Deviation slope**

Code	Specification
P	Positive, 0 to Vref
N	Negative, -4 to 4V
L	Positive, 0 to 10 V

