

Phase-Locked Ultra Low Phase Noise Multioutput Frequency Reference in 19" Rack Mountable Appliance 1U Form Factor

Product Data Sheet

Features

- Locks to either 10 MHz reference or 1 PPS input
- Ultra-Low Phase Noise (ULPN) on all Outputs
- 10 MHz, 100 MHz, and 1 PPS Outputs
- 1 PPS Output is Phase Aligned with 100 MHz Output
- Excellent holdover In the Absence of REF IN
- 10 MHz and 100 MHz internal SC-cut OCXO

Applications


- 5G device testing
- Significantly improves Phase Noise of incoming Reference signal
- COTS/Dual use

Inputs


10 MHz IN SMA Female
1 PPS IN SMA Female

Outputs

10 MHz OUT SMA Female
100 MHz OUT SMA Female
1 PPS OUT SMA Female

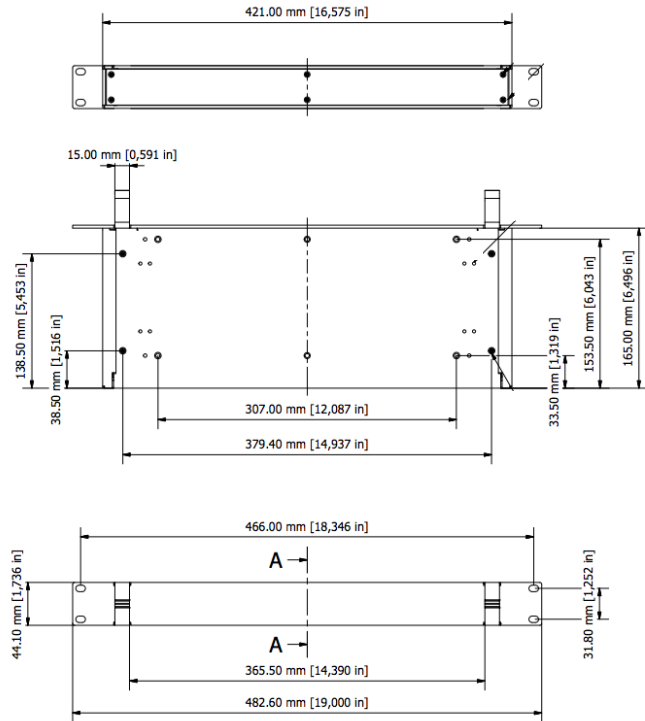


Mechanical Dimensions

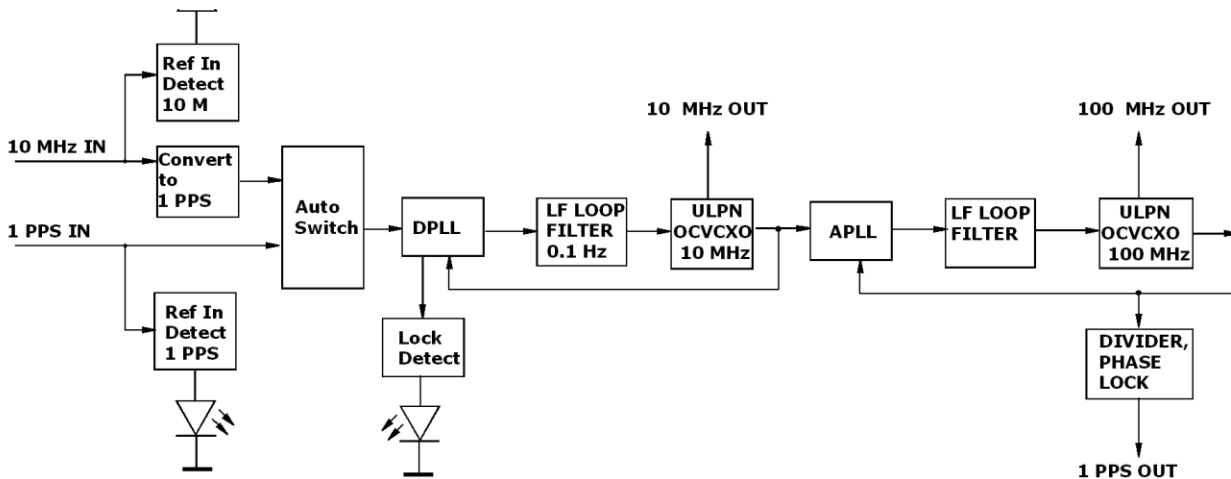

Ultra Low Phase Noise Phase-Locked Frequency Reference

Data Sheet 2046A

Front Panel

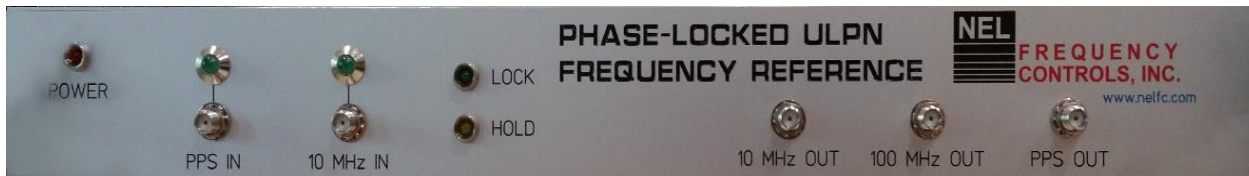

Specifications:

Parameter	Symb	Condition	Min	Typ	Max	Unit	Note
Absolute Maximum Ratings							
Power supply	Vp		90		260	V AC	
Operating Temp.	To		10		45	°C	
Storage temper.	Ts		0		70	°C	
Electrical							
Input	F10	10 MHz input		10.000		MHz	
	Fpps	1 PPS input		1		Hz	
10 MHz in	F10	CMOS	2			V pk-pk	Green LED
		Sine Wave	0		15	dBm	
1PPS in	1 PPS	TTL		2.5		V pk-pk	Green LED, priority if both present
		Pulse Width		1		us	
Frequency Capture Range (APR)	$\Delta F/F$	Over All	± 100			ppb	Includes variation vs. temperature, load, aging 10 years
Allan Deviation		.01s to 1s		5E-12			
Frequency stability	$\Delta F/F$	Locked	Equal to incoming signal				
Holdover	τ	8 hours		20		us	
Recommended MAX Input SSB Phase Noise	$\mathcal{L}(\Delta f)$	10 Hz			-90	dBc/Hz	10 MHz reference
		100 Hz			-120		
		1 KHz			-130		
		10 KHz			-140		
		100 KHz			-140		
Output SSB Phase Noise Improvement Compared to Input Phase Noise adjusted to 10 MHz	$\mathcal{L}(\Delta f)$	10 Hz		40		dBc/Hz	Cannot improve beyond listed below Output Phase Noise
		100 Hz		50			
		1 KHz		50			
		10 KHz		50			
		100 KHz		50			
Output Frequencies	F10			10.000		MHz	SMA
	F100			100.00			SMA
	1 PPS			1		Hz	SMA
SSB Phase Noise (achieved after 10 minutes warm-up) Noise floor	$\mathcal{L}(\Delta f)$	10 Hz		-145		dBc/Hz	10 MHz output
		100 Hz		-157			
		1 KHz		-162			
		10 KHz		-170			

Ultra Low Phase Noise Phase-Locked Frequency Reference

Data Sheet 2046A

		100 KHz		-172			
		10 Hz		-125		dBc/Hz	100 MHz output
		100 Hz		-132			
		1 KHz		-163			
		10 KHz		-177			
		100 KHz		-180			
Power Requirements	P	IEC320 on the back	100 to 250 V AC 50/60 Hz			V AC	
Spectral Purity		Subharmonics Spurious Harmonics		-80 -35	-70 -80 -30	dBc	At 100 MHz output Either output
Load	Internally AC-coupled 50 Ohm 15pF//10KOhm						Required on 10 MHz and 100 MHz Outputs 1 PPS
Output Waveform	Sinewave TTL, 1 us pulse width						10 MHz, 100 MHz 1 PPS
Output Power			+10 +12	+13 +15		dBm	10 MHz 100 MHz
Phase Misalignment		1 PPS Out edge to 100 MHz edge			2	ns	
Warm-up time	τ	to lock on 100 ppb input		3	5	minutes	
Lock Time after warm-up					20	minutes	
Lock Detect			Green LED				
Input Detect (either)			Green LED				
Holdover Mode			Green LED				

Environmental and Mechanical

Operating temp. range	+10°C to +45°C
------------------------------	----------------

